

Construction Products, Inc.

GENERAL NOTES


- 1. Most details included herein are drawn to full scale.
- Details shown herein, illustrate 2" deep system of 1/8" aluminum plate panels. Other system depths and plate thickness are available. Refer to other sections of this literature for additional options or consult Protean for any special requirements.
- 3. In general, panel attachment should be made along the long edge of the panels.
- 4. Details as shown herein illustrate a vertical installation with subgirts running horizontally and panel attachment located at the vertical joints. For a horizontal panel installation, modify details to install subgirts and panels in the oppsite direction of which they are shown herein.
- 5. Alternate subgirt layouts are available where subgirts can be oriented in the same direction of the long edge of the panels. Contact Protean for further information on these types of installations.
- 6. The enclosed details represent typical standard details for the AP-2125 system. In so much as the AP-2125 is a custom designed system, this is only the beginning of the possibilities. Consult Protean for assistance in developing custom details for your application.





Aluminum Plate AP-2125 Standard Details


Construction Products, Inc.


REFERENCE SHEET

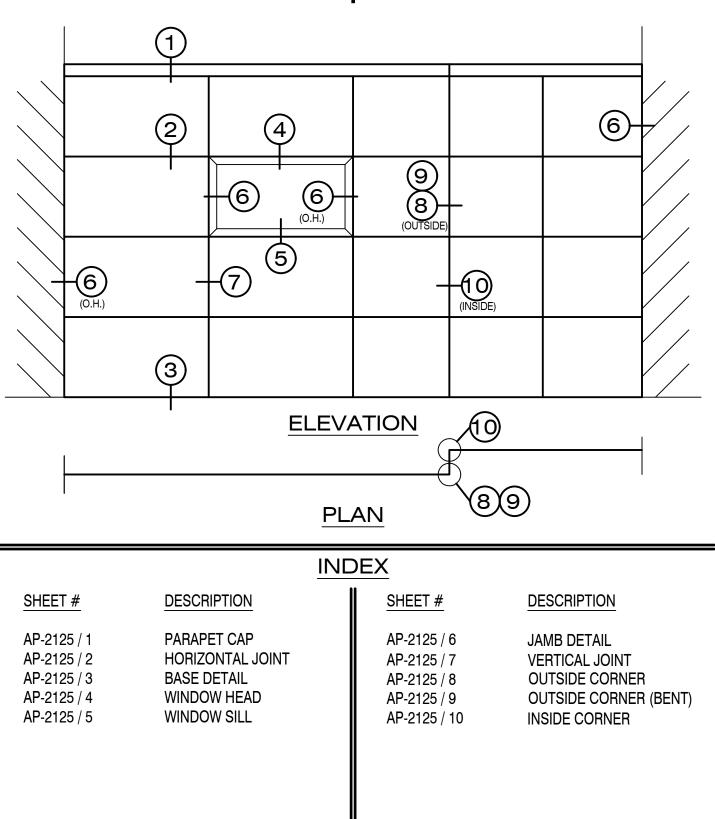


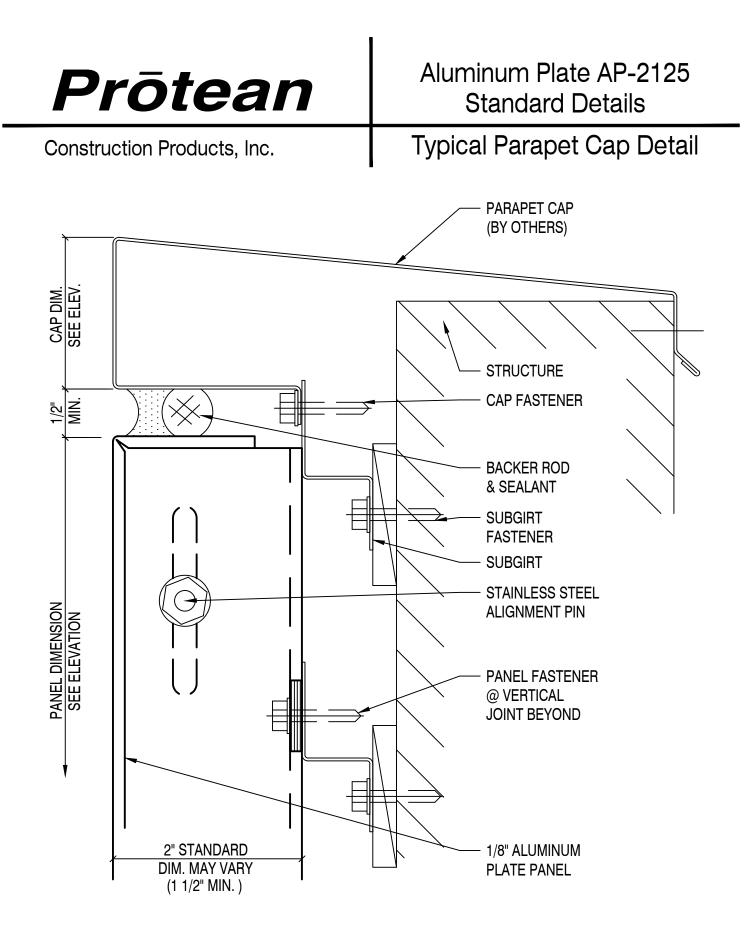


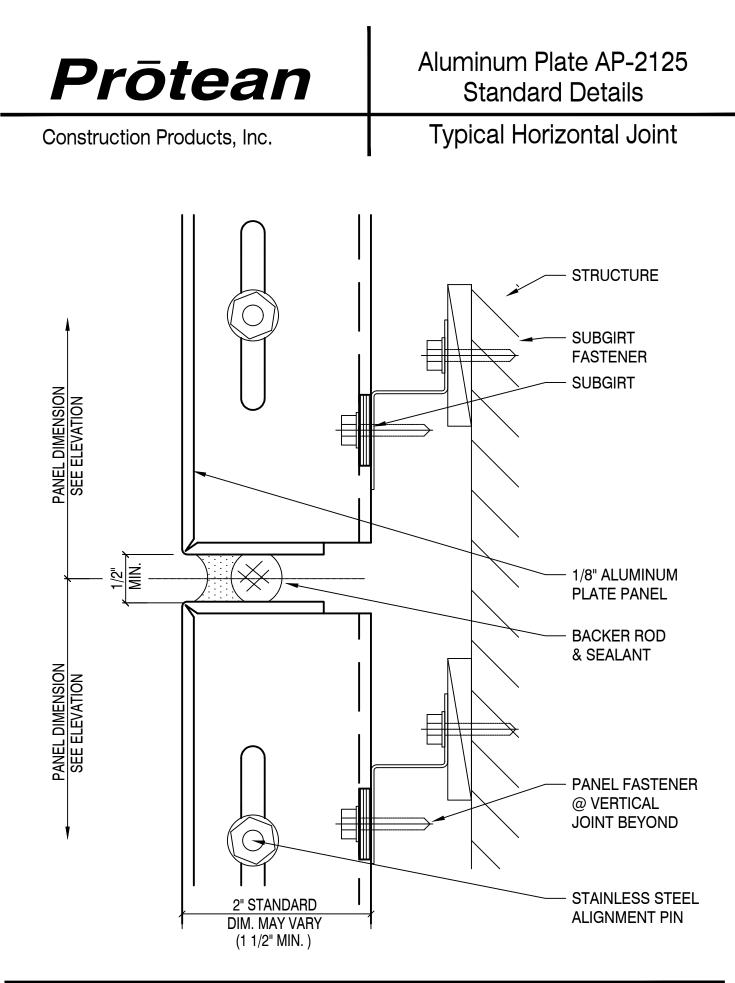

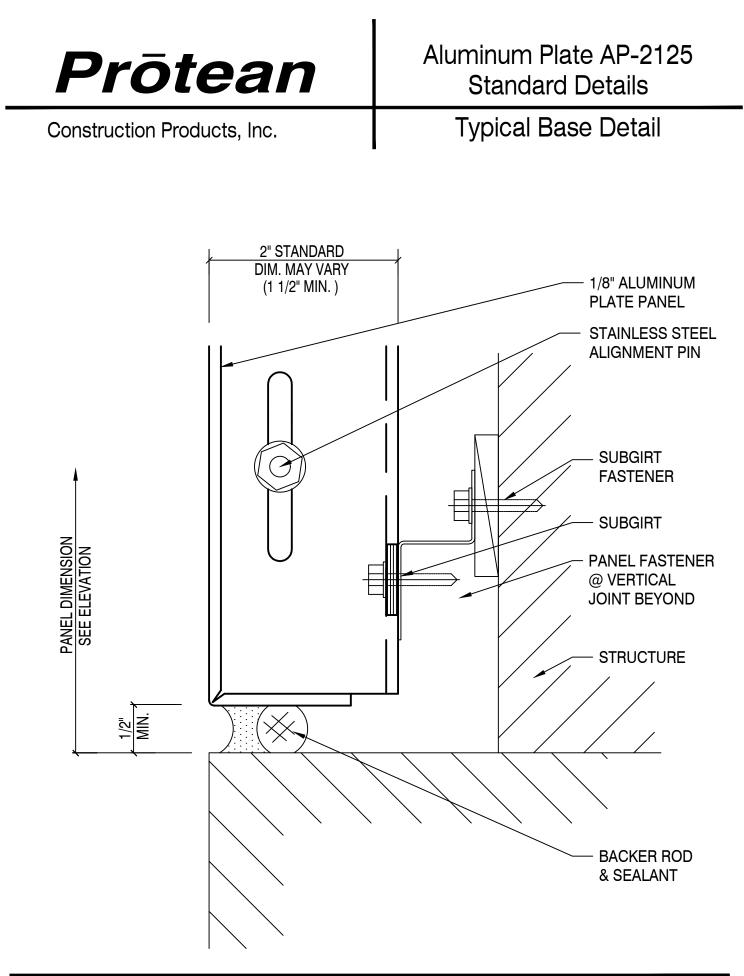

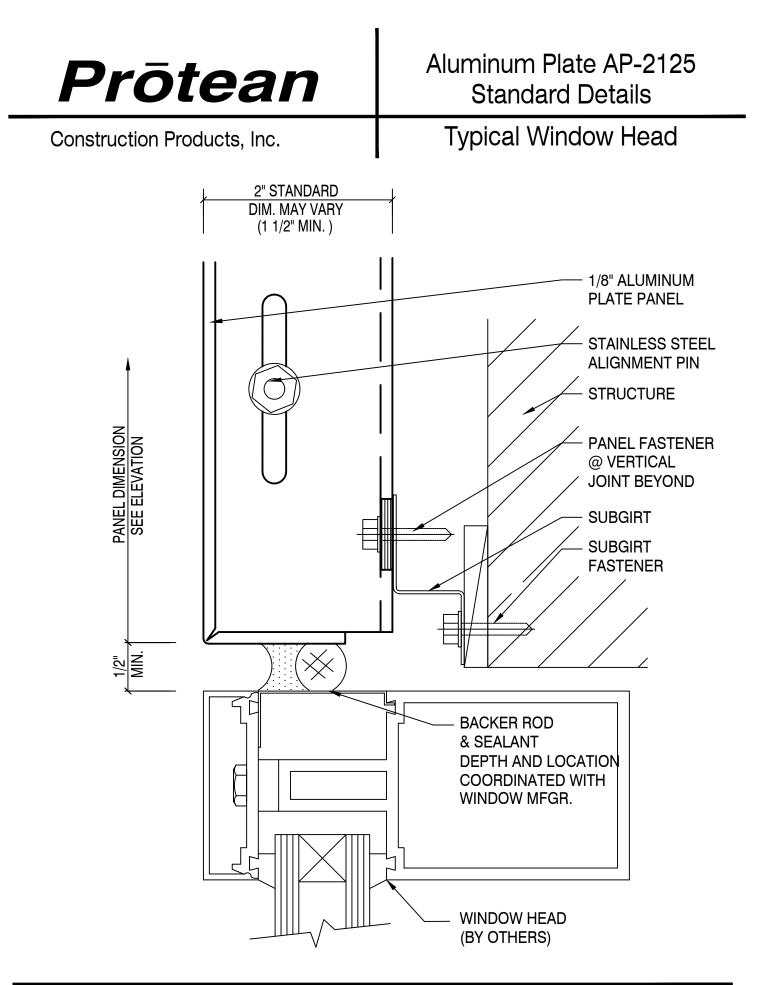

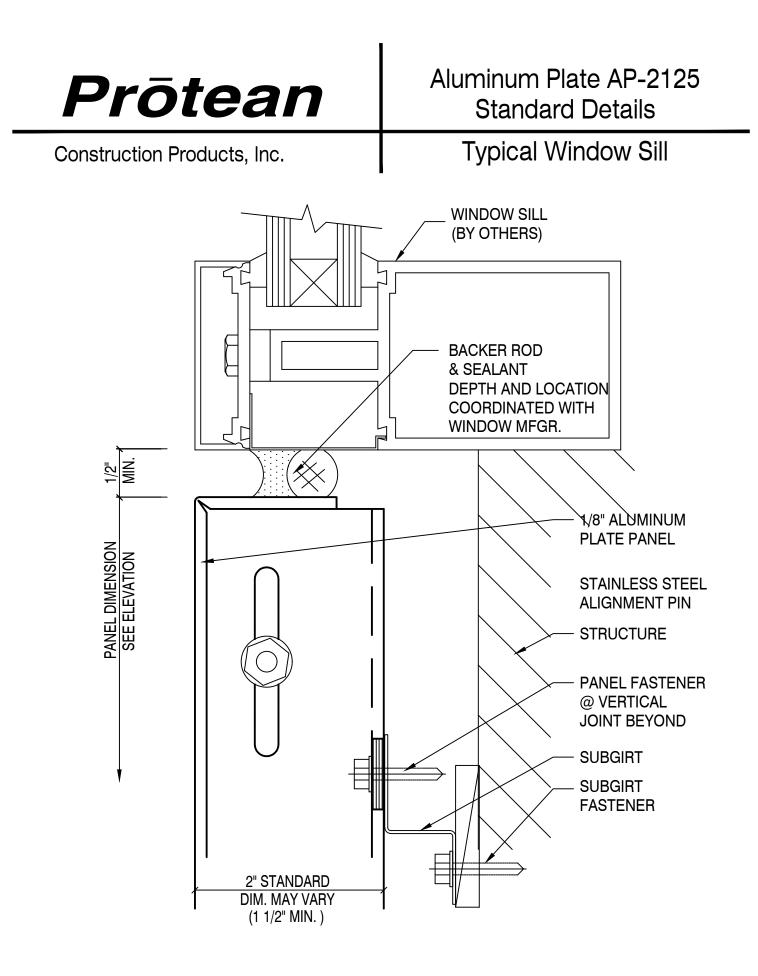

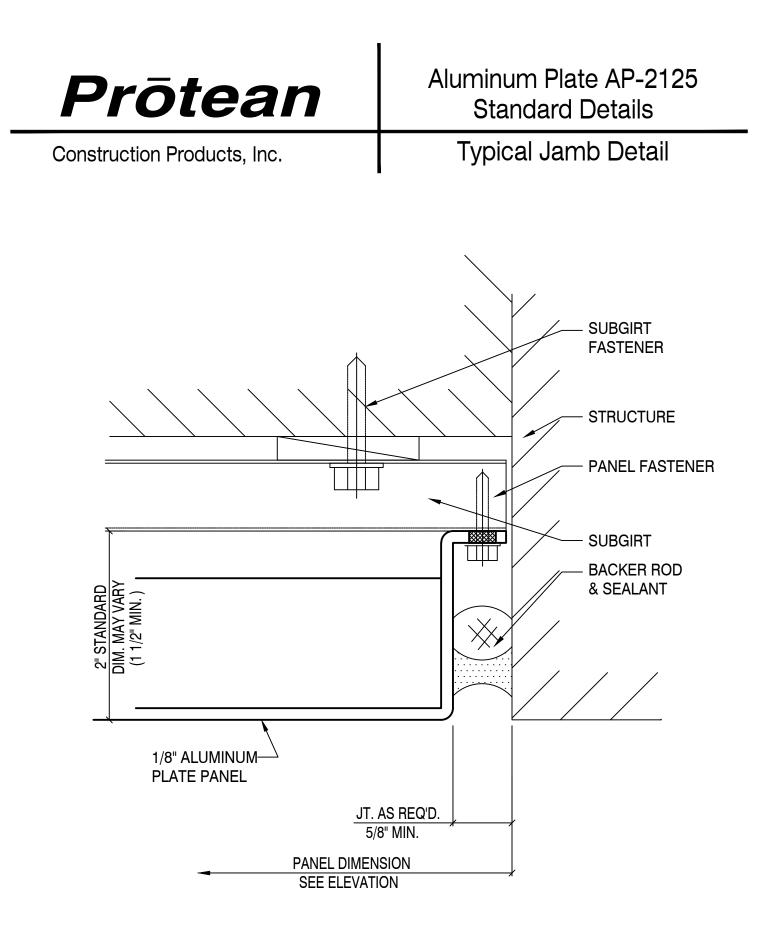



Construction Products, Inc.

Typical Vertical Joint Detail

